

## 40 Watt — LBS40W V2.0

Third Generation: class 2 dimming, dim-to-1%-to-off, standby power <0.5W

CONSTANT CURRENT LED DRIVER WITH 0-10V DIMMING.

US & CN, LED Driver Class 2

LBS Series Driver is a high-performance LED driver that provides smooth, continuous 1% dimming for virtually any LED fixture, whether it requires constant current. It provides the performance of class 2 isolating dimming and dim to off. It is the most versatile LED driver offered today due to its compatibility with a wide variety of LED arrays, multiple form factors, and numerous control options.




### Key Features

- Drive Mode: Constant Current, Dimming, Standby.
- Technology: Active PFC 1-Stage Switch Mode.
- Input Voltage: 120 to 277 Vac (UL), 100 to 240 Vac (ENEC).
- Output Power: 40 Watt Max.
- Dimming: Smooth & Continuous Dimming from 1% to 100%, dim-to-off. LEDs turn on to any dimmed level without going to full brightness. Constant Current Reduction (CCR) dimming methods.
  - 0-10V: 2 or 3-wire Analog / Digital Control Dimming (Isolated type).
- Output Voltage: 12 Vdc to 114 Vdc.
- Output Current: 350 mA to 1670 mA (100% load).
- Efficiency: Up to 88%.
- Warranty: 5 years.

### Special Features

- Continuous dimming from 1% to 100%, dim to off.
- Safety isolation between primary and secondary.
- Dimming control is class 2 isolated from AC input and DC output.
- Standby power <0.5W (when dim to off).
- The dimming curve is linear.
- A rated lifetime of 50,000 hours @ Tc = 85°C.
- Safety: UL8750, 2<sup>nd</sup> Edition, UL1310 Class 2, CSA22.2, EN61347.
- EMC: FCC 47CFR Part 15, Class B @120V & Class A @277V, EN55015.
- Inrush current limiting circuitry: AC power line: line to line 2 kV, eliminates circuit breaker tripping, switch arcing and relay failure.
- Plastic shell used with silicone potting. Meet the RoHs directive.
- IP65, NEMA4 compliant for dry, damp.
- 100% performance tested with CHROMA 8000 system at YG factory.
- 100% burned in with program-control test system at YG factory, at 50 degrees ambient temperature.

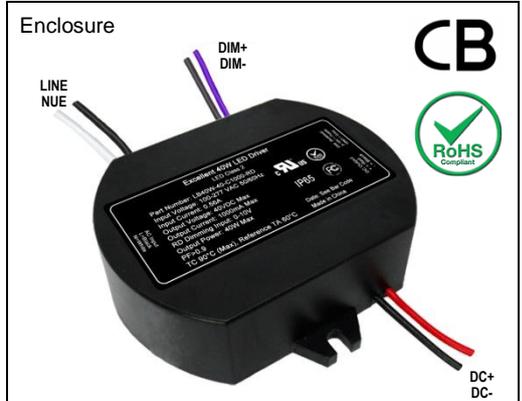

**Notice of use:**  
 1. The DIM+ line can't touch the DC+ line and AC line.  
 2. DC- cannot be shorted with the DIM-.

Size	Unit	Inch	Millimeter
Case Length		3.15	80.00
Case Width		3.07	78.00
Case Height		0.99	25.20
Mounting Length		2.76	70.00

**LED wiring distance**  
Recommended maximum wiring distance at full load.

AWG	#20	#19	#18	#17	#16
Distance (m)	14	18	22	28	36
Distance (ft)	45.9	59	72.2	91.9	118.1

### 40W 0-10V Dimming Part List

No.	Part Number	US Class 2	CN Class 2	Output Voltage Range	Output Current Range	Current Accuracy (typ.)	Power Factor	Output Power	Max. Eff.	UL	cUL	ENEC	CB
1	LBS40W-114-C0350-RD	—	—	57~114 Vdc	3.5 – 350 mA	±5%	0.90	40W	88%	✓	✓	✓	✓
2	LBS40W-80-C0500-RD	—	—	40~80 Vdc	5.0 – 500 mA	±5%	0.90	40W	88%	✓	✓	✓	✓
3	LBS40W-72-C0550-RD	—	—	36~72 Vdc	5.5 – 550 mA	±5%	0.90	40W	88%	✓	✓	✓	✓
4	LBS40W-57-C0700-RD	Yes	Yes	28~57 Vdc	7.0 – 700 mA	±5%	0.90	40W	87%	✓	✓	✓	✓
5	LBS40W-48-C0830-RD	Yes	Yes	24~48 Vdc	8.3 – 830 mA	±5%	0.90	40W	87%	✓	✓	✓	✓
6	LBS40W-43-C0930-RD	Yes	Yes	21~43 Vdc	9.3 – 930 mA	±5%	0.90	40W	86%	✓	✓	✓	✓
7	LBS40W-40-C1000-RD	Yes	Yes	20~40 Vdc	10 – 1000 mA	±5%	0.90	40W	86%	✓	✓	✓	✓
8	LBS40W-36-C1100-RD	Yes	Yes	18~36 Vdc	11 – 1100 mA	±5%	0.90	40W	85%	✓	✓	✓	✓
9	LBS40W-30-C1300-RD	Yes	Yes	15~30 Vdc	13 – 1300 mA	±5%	0.90	39W	85%	✓	✓	—	—
10	LBS40W-24-C1670-RD	Yes	Yes	12~24 Vdc	16 – 1670 mA	±5%	0.90	40W	84%	✓	✓	✓	✓



### 40W Constant Current Part List

No.	Part Number	US Class 2	CN Class 2	Output Voltage Range	Output Current	Current Accuracy (typ.)	Power Factor	Output Power	Max. Eff.	UL	cUL	ENEC	CB
1	LBS40W-114-C0350	—	—	57~114 Vdc	350 mA	±5%	0.90	40W	88%	✓	✓	✓	✓
2	LBS40W-80-C0500	—	—	40~80 Vdc	500 mA	±5%	0.90	40W	88%	✓	✓	✓	✓
3	LBS40W-72-C0550	—	—	36~72 Vdc	550 mA	±5%	0.90	40W	88%	✓	✓	✓	✓
4	LBS40W-57-C0700	Yes	Yes	28~57 Vdc	700 mA	±5%	0.90	40W	87%	✓	✓	✓	✓
5	LBS40W-48-C0830	Yes	Yes	24~48 Vdc	830 mA	±5%	0.90	40W	87%	✓	✓	✓	✓
6	LBS40W-43-C0930	Yes	Yes	21~43 Vdc	930 mA	±5%	0.90	40W	86%	✓	✓	✓	✓
7	LBS40W-40-C1000	Yes	Yes	20~40 Vdc	1000 mA	±5%	0.90	40W	86%	✓	✓	✓	✓
8	LBS40W-36-C1100	Yes	Yes	18~36 Vdc	1100 mA	±5%	0.90	40W	85%	✓	✓	✓	✓
9	LBS40W-28-C1400	Yes	Yes	14~28 Vdc	1400 mA	±5%	0.90	39W	85%	✓	✓	—	—
10	LBS40W-24-C1670	Yes	Yes	12~24 Vdc	1670 mA	±5%	0.90	40W	84%	✓	✓	✓	✓

### Input Specifications

Parameter	Min.	Typ.	Max.	Notes / Conditions
Input Voltage	100 Vac	---	277 Vac	100, 120, 230, 240, 277 Vac Nominal Values
Input Frequency	47 Hz	50/60 Hz	63 Hz	50/60 Hz Nominal
Input AC Current	---	---	0.43 A	Measured at 120 Vac / 60Hz Input, Output Full Load.
	---	---	0.24 A	Measured at 230 Vac / 50Hz Input, Output Full Load.
	---	---	0.21 A	Measured at 277 Vac / 60Hz Input, Output Full Load.
Inrush Current ( Peak )	---	30 A / 2uS	40 A / 3uS	Measured at 120 Vac / 60Hz Input, Output Full Load.
	---	40 A / 2uS	50 A / 3uS	Measured at 277 Vac / 60Hz Input, Output Full Load.
Leakage Current	---	---	300 μA	Measured at 120 Vac / 60Hz Input, Output Full Load.
	---	---	700 μA	Measured at 277 Vac / 60Hz Input, Output Full Load.
THD	---	12%	20%	Measured at 120, 230 Vac Input, ≥ 50% Load. 277 Vac Input, ≥ 80% load
Power Factor ( PF )	0.90	---	0.99	
Standby Power	0.1 W	0.2 W	0.5 W	Measured at 120, 230, 277 Vac Input, when dim to off ( $V_{dim} < 1.0V$ ).

### Output Specifications

Parameter	Min.	Typ.	Max.	Notes / Conditions
DC Output Voltage	Per Table	Per Table	Per Table	Per Tables on Page 1, The voltage is DC+ to DC-.
Constant Current Accuracy	---	+/-5%	---	Per Tables on Page 1. +/-7.5% @<83% load
Flickering Index ( Vpk-pk )	---	---	25% Vo	20MHz BW, 1-100% dimming output in parallel with 0.1uF & 10uF CAP. Output power > 83% Po, current of each LED lamp > 75% IFmax. Flickering Index is defined as $[(Y_{max}-Y_{min})/(Y_{max}+Y_{min})] * 100\%$ . Y may be V or I
Flickering Index ( Ipk-pk )	---	30% Io	---	
Line Regulation	-3%	---	+3%	Measured at 120-277 Vac Input, Output Full Load
Load Regulation	-4%	---	+4%	Measured at 120-277 Vac Input
Start-up Time	---	330ms	500ms	Measured at 120-277 Vac Input, Output Full Load
	---	460ms	500ms	Measured at 120-277 Vac Input, Dimming set at 50%
	---	1.0 s	1.3 s	Measured at 120-277 Vac Input, Dimming set at 10%
	---	1.8 s	2.1 s	Measured at 120-277 Vac Input, Dimming set at 1%
Output Overshoot	-5%	---	+10%	Measured at 120-277 Vac Input, When power on or off
Dim to Off Time	nc	---	0.4 s	Normal off. (default)
	-S	---	2.0 s	Soft off (Pending)

### Protection Specifications

Parameter	Min.	Typ.	Max.	Notes / Conditions
Output Short Circuit ( SCP )	---	---	---	No Damage. Auto recovery after short is removed.



Output Over Current ( OCP )	---	---	+10% Io	Constant Current Limiting circuit.
Output Over Voltage ( OVP )	---	---	+20% Vo	No Damage. Auto recovery after short is removed.

### Dimming Specifications

Items	Parameter	Min.	Typ.	Max.	Notes / Conditions	
0-10V Dimming  (Compatible PWM, Rset Dimming, Additional datasheet)	Input Absolute Voltage	-2.0 V	10 V	15 V	Purple Wire	
	Output Source Current (Customizable)	---	---	0.56 mA	Purple Wire	
	Output Current Range in 0-10V Dimming (This note is in the case of linear dimming)	nc	0%	---	100%	Dim-to-off @ Vdim < 1.0V, 100% @ Vdim > 8.5V
		-A	1%	---	100%	1% @ Vdim < 1.2V, 100% @ Vdim > 8.5V
		-B	5%	---	100%	5% @ Vdim < 1.2V, 100% @ Vdim > 8.5V
		-C	10%	---	100%	10% @ Vdim < 1.2V, 100% @ Vdim > 8.5V
Output Current in 0-10V Pin Open	---	Normal	---	Maximum output		
Output Current in 0-10V Pin Short Circuit	---	Dim to Off	---	Into standby		
Output Current Delay	Transient Response of Dimming	---	600ms	---	Delay time, when Vdim steps from 0V to 10V	

### General Specifications

Parameter	Min.	Typ.	Max.	Notes / Conditions
Cooling	Convection			
MTBF	430,000 hours			Measured at 120 Vac input, 100% Load and Tc=85° C (MIL-HDBK-217F).
Lifetime	50,000 hours			
Acoustic Noise	< 24 dB Class A			Not to exceed at 1 meter at any dim level.

### Environmental Specifications

Parameter	Min.	Typ.	Max.	Notes / Conditions
Case Temperature ( Tc )	-40 °C	---	+90 °C	Measured at location specified on case.
Operating Temperature ( Ta )	-40 °C	---	+50 °C	This is a reference range. Tc controls temperature range.
Storage Temperature ( Ts )	-40 °C	---	+85 °C	Non-operating temperature range.
Operating Humidity	---	---	95% RH	Relative Humidity. Non-condensing.
Vibration	5 Hz	---	55 Hz	2G, 10 minutes / 1 cycle, period 30 minutes, each along X, Y, Z axis.

### Safety Compliance

Safety Category	Standards / Notes
UL / cUL	UL8750, UL1310 Class 2, UL1012 Non Class 2, CSA-C22.2 No. 107.1
CE	EN 61347-1:2007+A1:2010+A2:2012, EN61347-2-13:2014, EN 62493:15
Withstand Voltage	Input to Output: 2000 Vac (UL), 3750 Vac (CE, ENEC) Output to Dim: 2500 Vac
Isolation Resistance	Input to Output: >10MΩ, 500Vdc @ 25°C, 70% RH
0-10V Class 2 Isolated Dimming	DIM+ (Purple) / DIM- (Grey) are Class 2 Isolated from AC Input and DC Output.

### EMC Compliance


EMI Category	Standards
FCC	FCC 47CFR Part 15, ANSI C63.4: 2009
CE	EN55015:2013+A1:2015, EN 61000-3-2:2014, EN 61000-3-3:2013

Energy Star	Energy Star transient protection: Ballast or driver shall comply with ANSI/IEEE C62.41.1-2002 and ANSI/IEEE C62.41.2-2002, Category A operation. The line transient shall consist of seven strikes of a 100KHZ ring wave, 2.5KV level, for both common mode and differential mode.
EMS Category	Notes
EN 61000-4-2	Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS
EN 61000-4-4	Electrical Fast Transient / Burst-EFT
EN 61000-4-5	Surge Immunity Test: AC Power Line: line to line 2 kV
EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS
EN 61000-4-11	Voltage Dips
EN 61547	Electromagnetic Immunity Requirements Applies to Lighting Equipment


Note: the above test data are in the condition of 25 C ambient temperature, except for the marked temperature.

## Typical Applications


### ■. Constant Current Driver

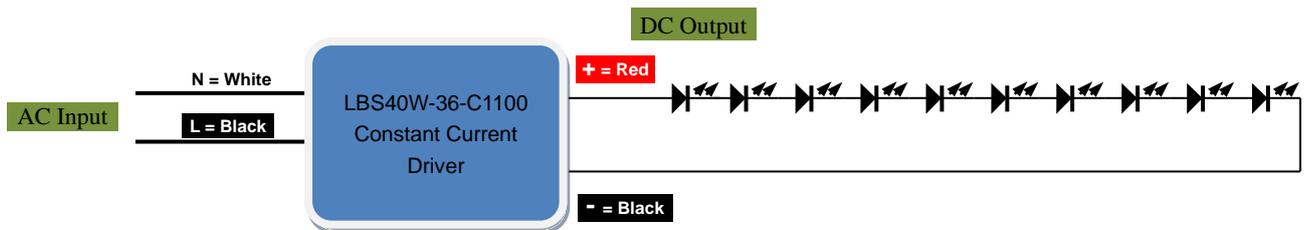

### ■. 0-10V Dimming Driver

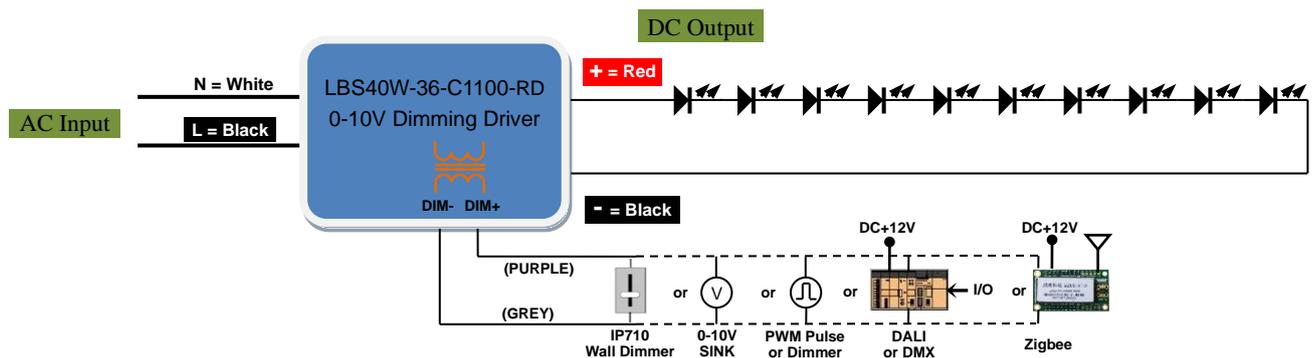

### Dimming Curve

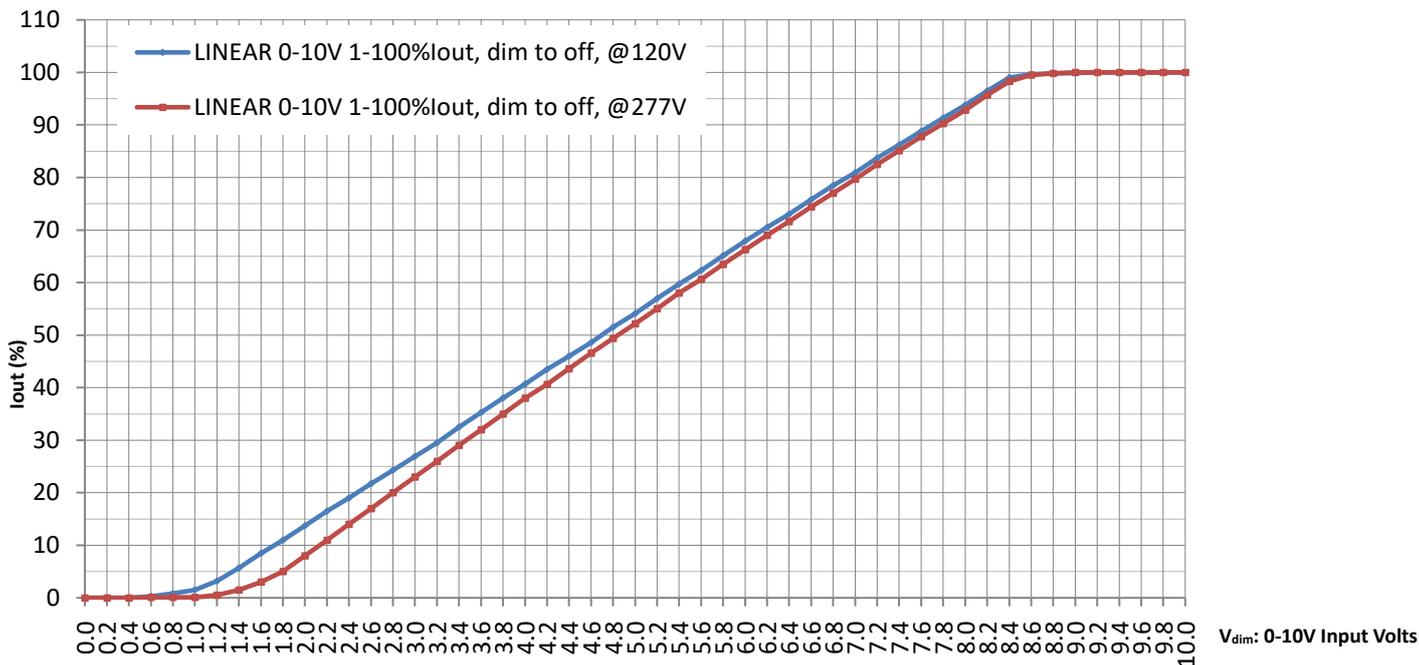


Note:

1. The dimming curve is linear.
2. V<sub>dim\_ON</sub> is 1.2V, V<sub>dim\_OFF</sub> is 1.0V. Driver goes into standby state, when V<sub>dim</sub> is less than 1.0V.


### Power Operating Window

The DLC working area of output 36V/1100mA.

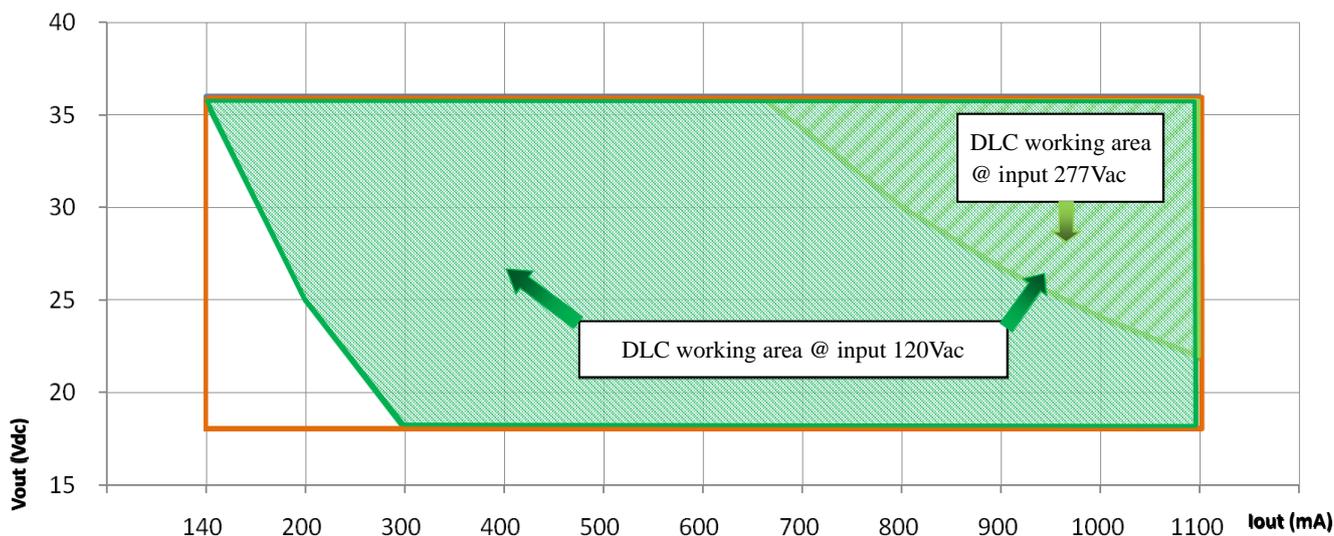


**Characteristic Curve**


Typical Efficiency vs. Pout at 25°C Ambient Temp

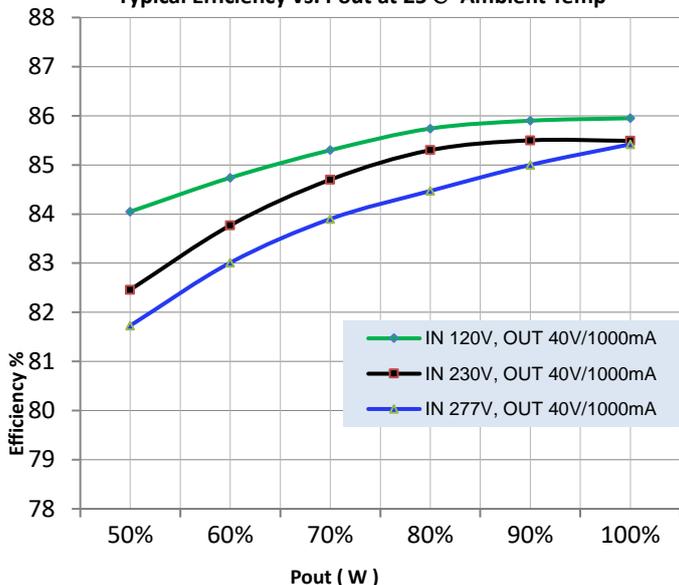


Typical PF vs. Pout at 25°C Ambient Temp

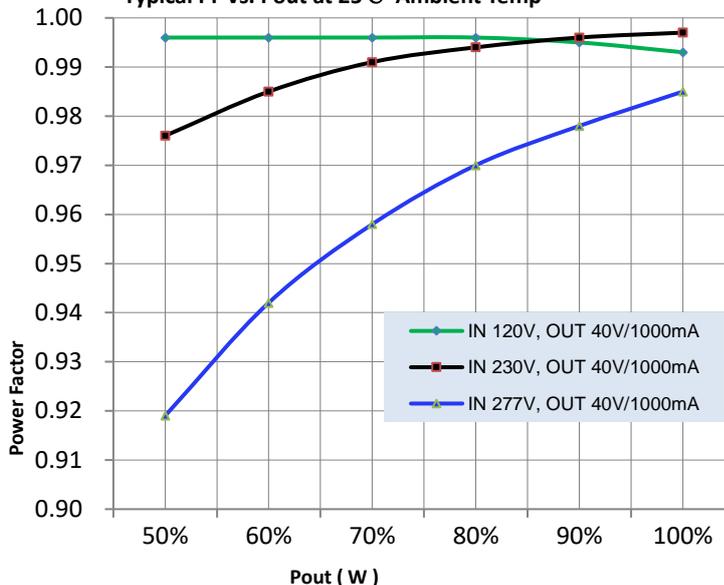

Typical THD vs. Pout at 25°C Ambient Temp

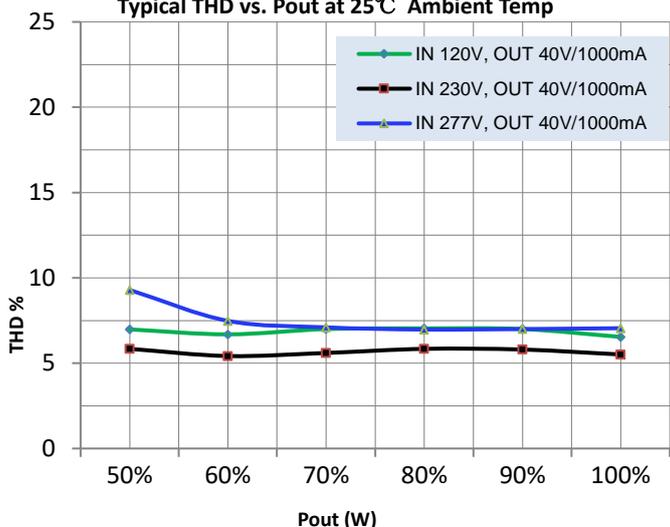

Lifetime vs. Tcase Temp

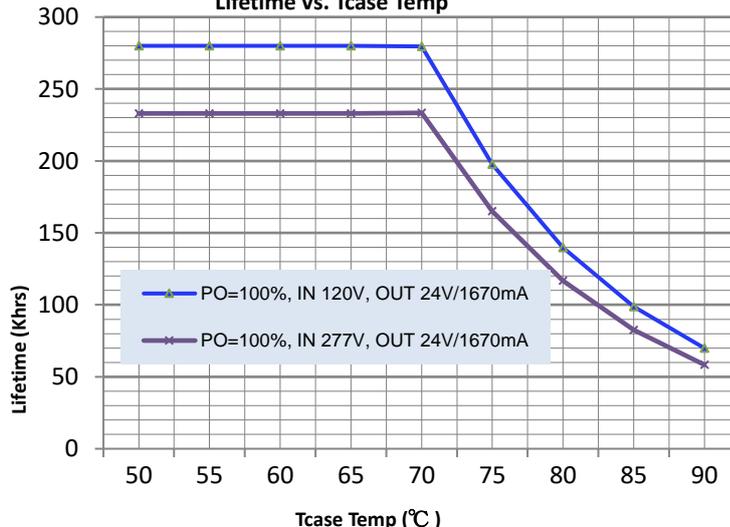

**Installation**

AC input for connection the two core ANSI/UL1015/AWG18 temperature 105 °C core copper wire connection.

Cable Length: 150mm, stripping on the tin: 10mm.

Where: L — Black wire, N — White wire.

DC output for connection the two core ANSI/UL1569/AWG18 temperature 105 °C core copper wire.

Cable Length: 150mm, stripping on the tin: 10mm.

Where: DC+ — Red, DC- — Black.

The dimmer control input is the two copper wires, ANSI/UL1569/AWG22 & temperature 105 °C.

Cable Length: 150mm, stripping on the tin: 10mm.


Where: DIM+ (0-10V) input — Purple wire, DIM- — Grey wire.

This product has two Φ4.0mm mounting holes.




**Application note**

Picture 1

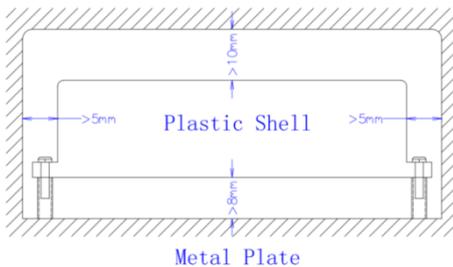

Picture 2

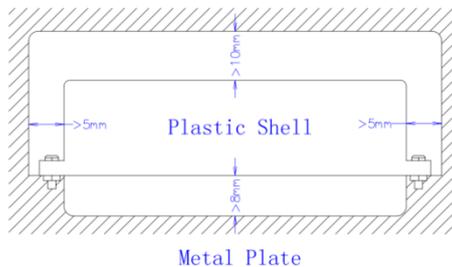

In Picture 1 and Picture 2,  
EMC has the best.

**Note :**

- The independent LED drive conforms to the EMC standard.  
But it is not guaranteed to be qualified when the drive is mounted in the LED lamp.
- Please forgive us for any discrepancy due to the update of the specifications or the upgrade of the product.  
If you need the latest information, please contact our marketing department.